


XP Mobile Shear (GXP)

FEATURES

- 1 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 2 Enclosed structure adds strength and rigidity while protecting the cylinder
- 3 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 4 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary and secondary cutting blades pass
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Weldox steel for the best combination of structural strength and wear durability

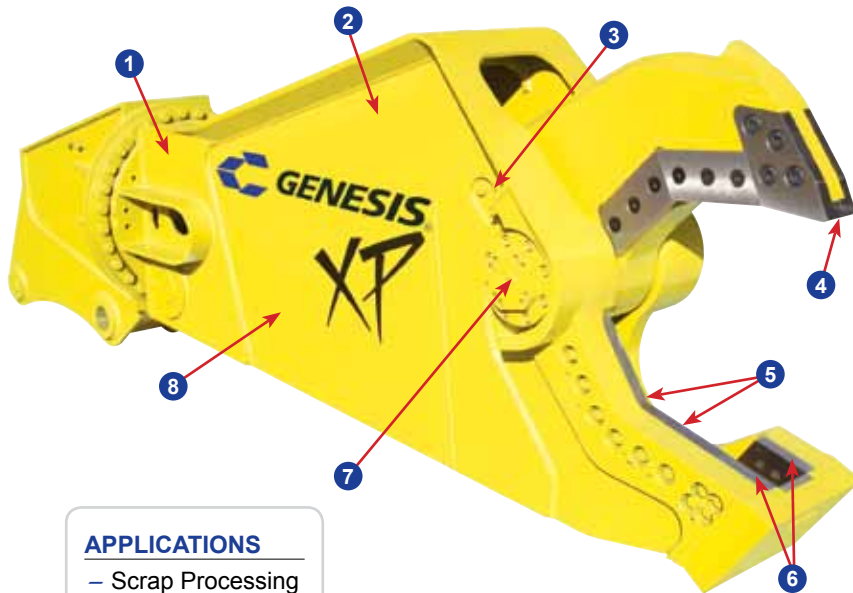

APPLICATIONS

- Scrap Processing
- Demolition

Model Number	Shear Weight (lbs.)	Jaw Opening (ins.)	Jaw Depth (ins.)	Shear Force at 5000 psi (tons)	Shear Force at 5500 psi (tons)	Typical Reach (ft. ins.)	Minimum Excavator Wt. Boom Mounted (lbs)	Minimum Excavator Wt. Stick Mounted (lbs)
* GXP 200	5,000	18	17	609	670	5' 10"	25,000	40,000
* GXP 200R	5,500	18	17	609	670	8' 9"	30,000	45,000
* GXP 300	7,700	23	24	800	880	7' 0"	36,000	50,000
* GXP 300R	8,100	23	24	800	880	10' 2"	45,000	68,000
GXP 400	8,800	28	29	980	1,078	8' 0"	45,000	75,000
GXP 400R	11,000	28	29	980	1,078	11' 7"	55,000	90,000
** GXP 440 MAXX	11,400	28	29	1,047	1,151	8' 9"	50,000	80,000
** GXP 440R MAXX	13,000	28	29	1,047	1,151	12' 2"	60,000	100,000
GXP 500	12,050	32	32	1,208	1,329	9' 1"	55,000	98,000
GXP 500R	13,350	32	32	1,208	1,329	12' 5"	67,000	110,000
** GXP 660 MAXX	13,700	32	32	1,475	1,625	10' 0"	60,000	100,000
** GXP 660R MAXX	15,500	32	32	1,475	1,625	13' 6"	75,000	120,000
GXP 700	13,800	35	35	1,460	1,606	10' 0"	70,000	110,000
GXP 700R	17,000	35	35	1,460	1,606	13' 10"	90,000	135,000
** GXP 990 MAXX	15,500	35	35	2,182	2,400	10' 7"	88,000	135,000
** GXP 990R MAXX	18,500	35	35	2,182	2,400	15' 0"	100,000	170,000
GXP 1000	15,000	38	38	1,750	1,925	10' 9"	90,000	140,000
GXP 1000R	18,000	38	38	1,750	1,925	15' 1"	100,000	170,000
GXP 1200	20,700	42	42	2,245	2,470	11' 0"	110,000	170,000
GXP 1200R	26,300	42	42	2,245	2,470	15' 11"	130,000	250,000
GXP 1500	23,700	44	44	2,590	2,849	11' 6"	120,000	190,000
GXP 1500R	29,500	44	44	2,590	2,849	16' 5"	160,000	250,000
GXP 2500	46,000	46	48	3,015	3,317	14' 7"	200,000	280,000
GXP 2500R	54,000	46	48	3,015	3,317	21' 9"	240,000	360,000

*GXP 200 and 300 series shears offer a single guide blade system.

**GXP MAXX models deliver extra shear power for heavy-duty processing.
Extended reach brackets are available on all non-rotating shears.

All Genesis GXP "R" series shears feature continuous 360° rotation.

Genesis GXP shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance.