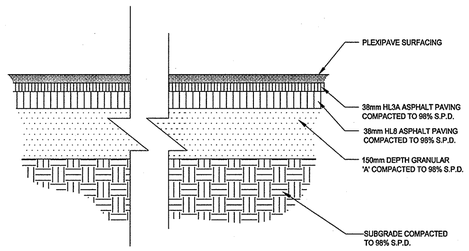

NOTES:

1. ENSURE THAT ALL ORGANIC MATTER IS REMOVED FROM THE EXCAVATED COURT PRIOR TO PLACING GRANULAR.
2. ALL LINES TO BE PAINTED WHITE AND 50mm WIDE.
3. PLEXIPAVE SURFACING TO BE SUPPLIED BY BARBER SPORT SURFACES LTD. TO ORDER CONTACT (905) 475-1611.
4. INSTALL PLEXIPAVE SYSTEM AS PER MANUFACTURER'S INSTRUCTIONS.

D 2 **TENNIS COURT PAVING**
N.T.S.

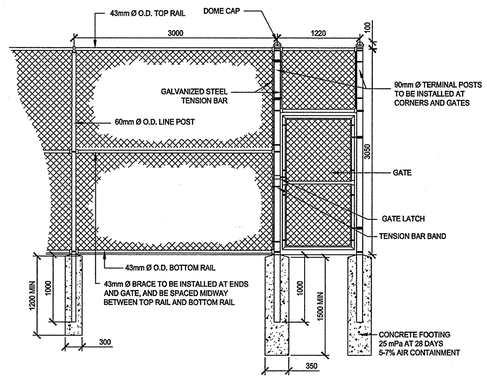

NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. ALL FENCE POSTS, FABRIC AND CAPS TO BE BLACK VINYL COATED.
3. PAINT ALL METAL SURFACES BLACK WITH GALVALUME PAINT.

D 3 **TENNIS COURT FENCE AND GATE**
NTS

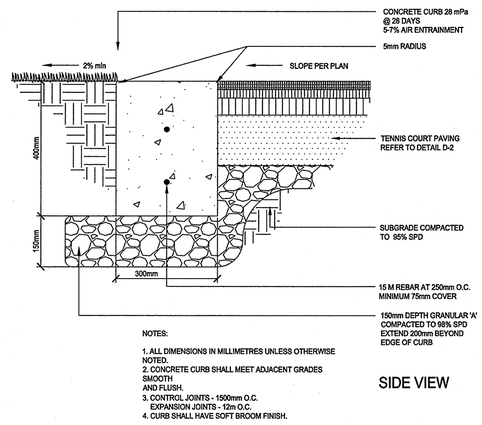

NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. CONCRETE CURB SHALL MEET ADJACENT GRADES SMOOTH AND FLUSH.
3. CONTROL JOINTS - 1500mm O.C.
   EXPANSION JOINTS - 12m O.C.
4. CURB SHALL HAVE SOFT BROOM FINISH.

SIDE VIEW

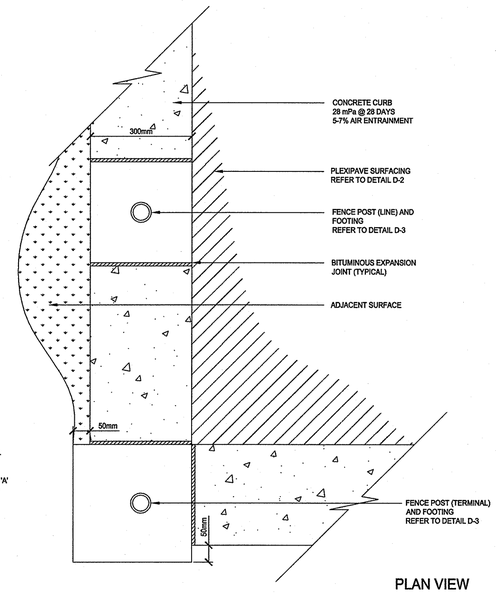

PLAN VIEW

D 4 **CONCRETE CURB**
N.T.S.

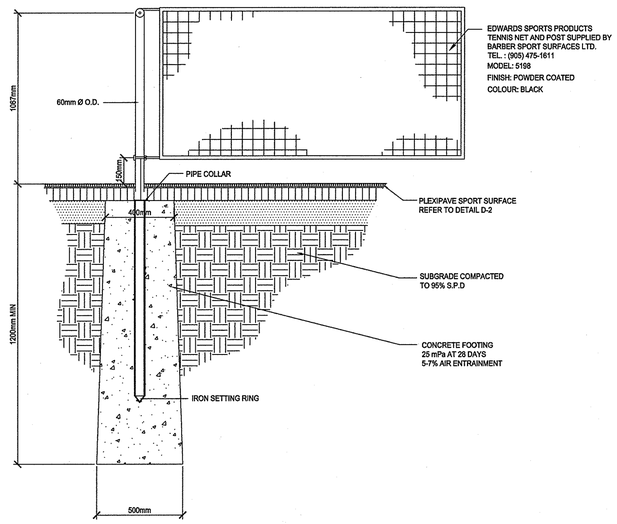

NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. POST SLEEVE TO BE SUPPLIED COMPLETE WITH MALLEABLE IRON PLUGS.
3. FOOTING DEPTH 1200mm MIN.

D 5 **TENNIS POSTS AND NET**
NTS

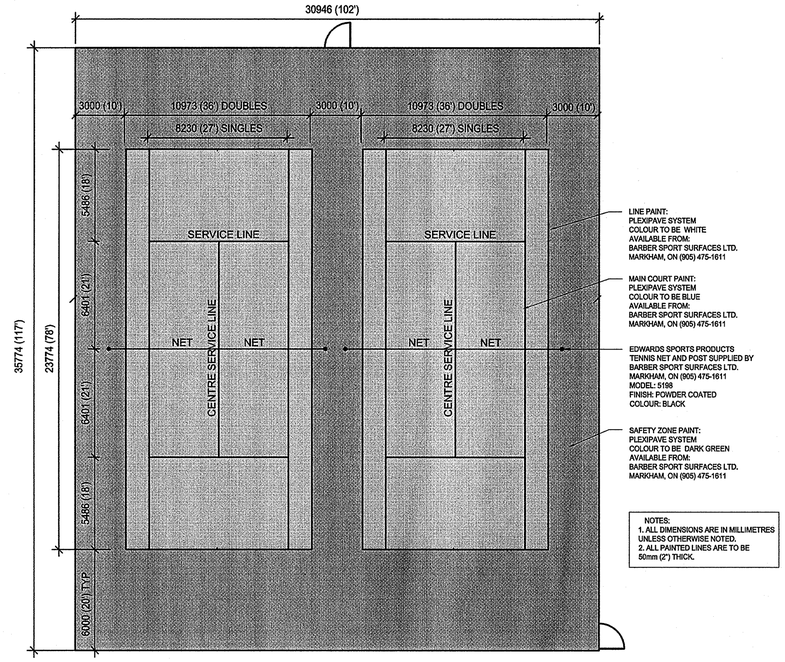

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. ALL PAINTED LINES ARE TO BE 50mm (2") THICK.

D 6 **TENNIS COURT LAYOUT**
N.T.S.

I:\2016\35\active\165802044 - South Guelph Community Park Tennis Courts\design\drawing\165802044_Landscape.dwg
2008-07-22 11:20AM By: devers

ORIGINAL SHEET – ARCH D